


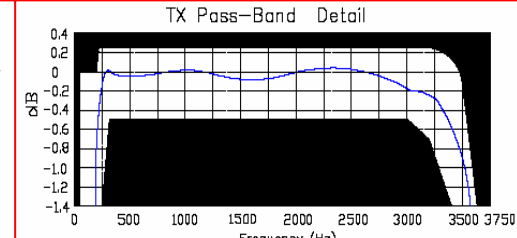
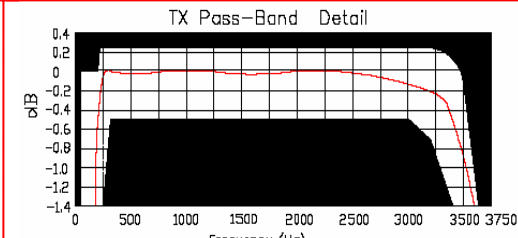
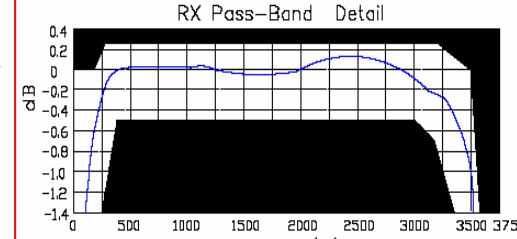
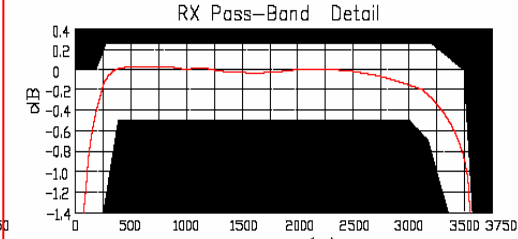


Comparison Sheet of TDM400P and TDM800

Item		TDM400P	TDM800	Pictures
Main Card	Compliant Modules	X100M, S110M	S2, O2 *	 <div style="display: flex; justify-content: space-around; margin-top: 5px;"> TDM400P TDM800 </div>
	Modules/Ports Number	4 modules / 4 ports	4 modules / 8 ports	
	Length*	5.31inch, easy to install	7.87inch, easy to install	
Interface	PCI Slot	PCI 2.2 compliant 3.3- or 5-volt	PCI 2.2 compliant 3.3- or 5-volt	 <div style="display: flex; justify-content: space-around; margin-top: 5px;"> S110M S2 </div>  <div style="display: flex; justify-content: space-around; margin-top: 5px;"> X100M O2 </div>
	Power	12V power connector for FXS	12V power connector for FXS	
	Line Interface	4 RJ11	2 RJ45 connect to 8 RJ11	
Voice Performance	Echo Cancellation	Hardware No/Software Yes	Hardware No/Software Yes	<p>* TDM800 is compatible with X100M and S110M</p> <p>* Half-length PCI is 6.875in</p> <p>* Full-length PCI is 12.283in</p> <p>* Both of them are meet the standard of Frequency Response.</p>
	Back-ground noise	Low	Low (same)	
	Frequency Response TX*			
	Frequency Response RX*			
Driver	Linux/Zaptel	Build-in, runs well	Patch for Zaptel, runs well	
	Windows	No	Yes	
Certification	CE & FCC	Yes	Yes	