


MyPBX Pro

---- Embedded Hybrid IP-PBX for Small Businesses

MyPBX Pro is a standalone embedded hybrid PBX for small businesses and remote branch offices of larger organizations. MyPBX Pro also offers a hybrid solution (a combination of VoIP applications using legacy telecom equipment) alternative for enterprises who are not yet ready to migrate to a complete VoIP solution.

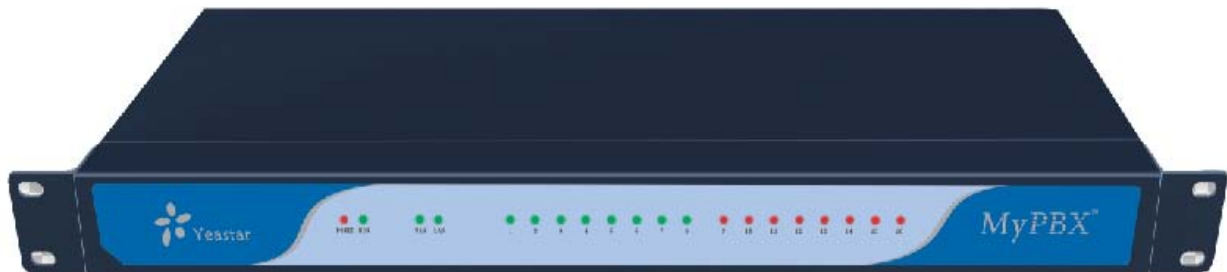

[Front Panel]

Datasheet for 'MyPBX Pro '**Specifications****Users:** 100**Concurrent Calls (Max):** 22**Voicemail:** 4000min**Interface:** Up to 16 Analog Ports (**FXO/FXS**)Up to 4 **GSM** PortsUp to 8 **BRI** Ports**Flash:** 512 MB Onboard Flash**RAM:** 128 MB Onboard RAM**LAN:** 1 (10/100Mbps)**WAN:** 1 (10/100Mbps)**Protocol:** SIP (RFC3261), IAX2**Transport:** UDP, TCP, TLS, SRTP**DTMF:** RFC2833, SIP INFO, In-band**Codec:** G.711 A/u-law, G.722, G.726, G.729 A, GSM, Speex, ADPCM, H261, H263, H263p, H264, MPEG4.**LED:** **Red** for FXO/GSM, **Orange** for BRI, **Green** for FXS**Network:** PPPoE, DHCP Client, Static IP
DHCP Server, VLAN, DDNS**Size:** 440x175x45 mm (**1U** Rack-Mount)**Weight:** 2500g**Power Supply:** AC 100~240V/50~60Hz (DC 12V, 5A)**Environment Conditions**

Operation Range: 0° to 40°C, 32° to 122° F

Storage Range: -20° to 65°C, 4° to 149° F

Humidity: 10-90% non-condensing

Features

Automated Attendant (IVR)

Auto Provision

Blind Transfer

Blacklist

Call Detail Records (CDR)

Call Forward

Call Parking

Call Pickup

Call Routing

Call Transfer

Call Waiting

Call Recording

Caller ID

Conference

Direct Inward System Access (DISA)

Distinctive Ringtone

Do Not Disturb (DND)

Faxes (T.38)

Firewall

Follow me

Intercom/Zone Intercom

Music on Hold

Music on Transfer

PIN User (PIN Code Control)

Queue

Ring Group

Route by Caller ID

Skype Integration (Skype Connect)

Speed Dial

Three-way Calling

Voicemail

[END]